




SPORTURF™

Eagle Putt

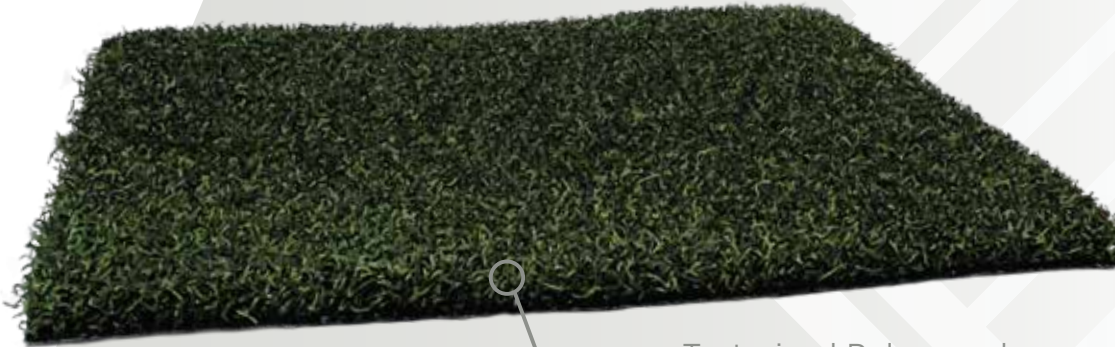



Texturized Polypropylene

PL-77

PROPERTY

DESCRIPTION

Primary/Stalk Yarn Polymer	Polpropylene
Yarn Cross Section	Texturized Polypropylene
Standard Color	Viridian (12'x15'); Forest Olive (15')
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	Silverback™ Polyurethane
Perforations	No
Polypropylene Yarn Denier/Ends	4600/8
Recommended Infill	2.5-3 lbs. Silica Sand
Pile Height	9/16"
Pile Weight	30 oz.

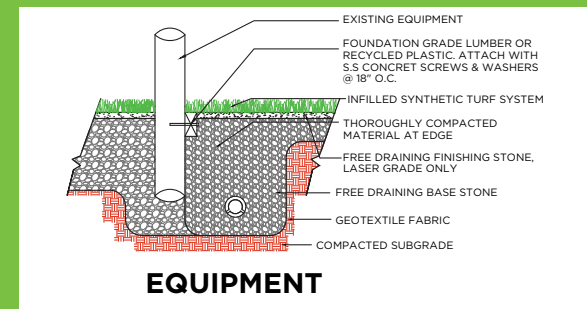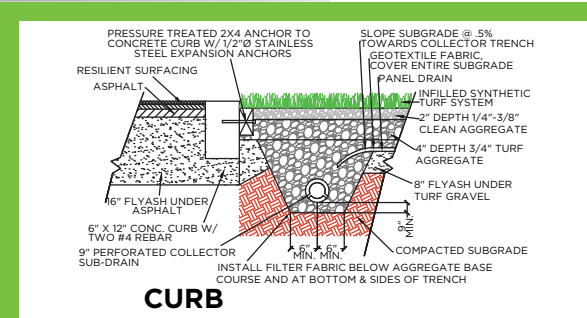

APPLICATION

The Multicolored yarn used in this product provides an authentic look that is hard to find. This product performs best with sand infill and is designed to hold short chip shots while providing a true roll. This product can be installed outdoors or indoors on a compacted aggregate base or over concrete.



*Custom colors available upon request



TESTING

EAGLE PUTT PL-77

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	.563	In.	14.29	mm.	D-5823
Face Weight	30	oz/yd ²	1,017	g/m ²	D-5848
Total Fabric Weight	57	oz/yd ²	1,933	g/m ²	D-5848
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5848
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	4,600	Denier	5,111	D-Tex	D-1577
Stitch Rate	14.5	Per 3"	18.99	Per 10 cm	D-5793
Machine Gauge	3/16"	In.	.95	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	>30	In/hr	>76	cm/hr	F-1551
Fabric Width	12 & 15	Ft.	3.6 & 4.6	M	None

