



SPORTURF™

Fresh Grass





PL903

PROPERTY

DESCRIPTION

Primary/Stalk Yarn Polymer	Polyethylene
Secondary/Thatch Yarn Polymer	Polypropylene
Yarn Cross Section	Polyethylene Monofilament Classic Spine/ Texturized Polypropylene
Standard Color	Field
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	SilverBack™ Polyurethane
Perforations	Yes
Polyethylene Yarn Denier/Ends	1500/6
Texturized Polypropylene Denier/Ends (Thatch)	4600/8
Recommended Infill	2-3 lbs. Silica Sand
Pile Height	1 1/2"
Pile Weight	40 oz.

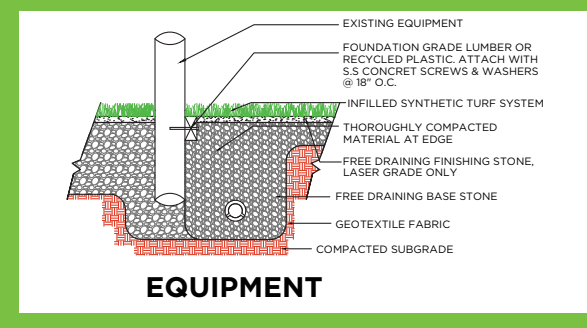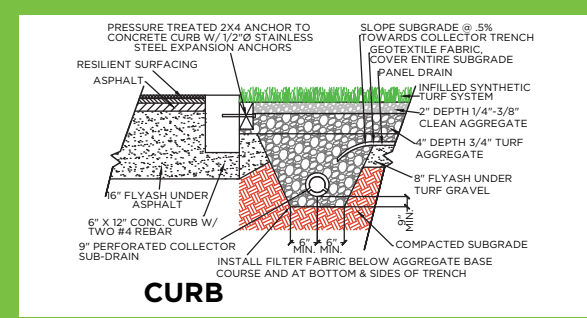

APPLICATION

Attractive and affordable, this product covers a large array of applications. This product can be used in fringe, landscape, walkways and much more. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



*Custom colors available upon request


TESTING
FRESH GRASS PL903
FINISHED FABRIC
ENGLISH SYSTEM
METRIC SYSTEM
ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	1.5	In.	38.1	mm.	D-5823
Face Weight	40	oz/yd ²	1,356	g/m ²	D-5848
Total Fabric Weight	67	oz/yd ²	2,272	g/m ²	D-5848
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	13,600	Denier	15,111	D-Tex	D-1577
Stitch Rate	7.75	Per 3"	10.15	Per 10 cm	D-5793
Machine Gauge	3/8"	In.	.95	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	>30	In/hr	>76	cm/hr	F-1551
Fabric Width	15	Ft.	4.6	M	None



11/12/2014