
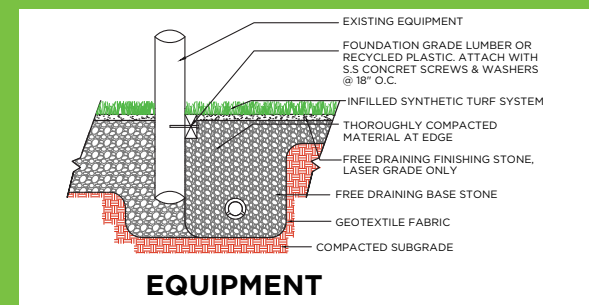


PL906

## PROPERTY

## DESCRIPTION

|   |   |
|---|---|
| <b>Primary/Stalk Yarn Polymer</b>                   | Polyethylene  |
| <b>Secondary/Thatch Yarn Polymer</b>                | Polyethylene  |
| <b>Yarn Cross Section</b>                           | Polyethylene Monofilament Classic Spine/<br>Texturized Polyethylene |
| <b>Standard Color</b>                               | Field/Olive; Field/Lime   |
| <b>UV Stabilized</b>                                | Yes   |
| <b>Fabric Construction</b>                          | Tufted  |
| <b>Primary Backing</b>                              | Dual Layered Woven Polypropylene                                    |
| <b>Coating Type</b>                                 | SilverBack™ Polyurethane  |
| <b>Perforations</b>                                 | Yes   |
| <b>Polyethylene Yarn Denier/Ends</b>                | 1500/6  |
| <b>Texturized Polyethylene Denier/Ends (Thatch)</b> | 5000/9  |
| <b>Recommended Infill</b>                           | 2-3 lbs. Silica Sand  |
| <b>Pile Height</b>                                  | 1 3/4"  |
| <b>Pile Weight</b>                                  | 71 oz.  |

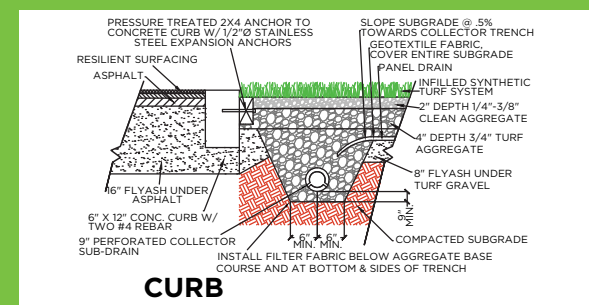

## APPLICATION

This is a very versatile landscape product. The multi-colored yarn provides an authentic color and the added thatch can simulate dormant grass. This product can also be used for walkways, pet areas, fringes, and much more. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



\*Custom colors available upon request


**TESTING**
**MIRAGE PL906**
**FINISHED FABRIC**
**ENGLISH SYSTEM**
**METRIC SYSTEM**
**ASTM TEST**

| <i>Nominal Specification</i>        | <i>Value</i> | <i>Units</i>       | <i>Value</i> | <i>Units</i>     | <i>Method</i> |
|-------------------------------------|--------------|--------------------|--------------|------------------|---------------|
| <b>Pile Height (Nominal)</b>        | 1.75         | In.                | 44.45        | mm.              | D-5823        |
| <b>Face Weight</b>                  | 71           | oz/yd <sup>2</sup> | 2,407        | g/m <sup>2</sup> | D-5848        |
| <b>Total Fabric Weight</b>          | 98           | oz/yd <sup>2</sup> | 3,322        | g/m <sup>2</sup> | D-5848        |
| <b>Primary Backing Weight</b>       | 7.4          | oz/yd <sup>2</sup> | 251          | g/m <sup>2</sup> | D-5848        |
| <b>Secondary Coating Weight</b>     | 20           | oz/yd <sup>2</sup> | 678          | g/m <sup>2</sup> | D-5848        |
| <b>Tuft Bind</b>                    | >8           | lbs.               | >3.6         | kg.              | D-1335        |
| <b>Grab Tear Strength (Average)</b> | >200         | lbs.               | >91          | kg.              | D-2256        |
| <b>Lead Content</b>                 | <50          | ppm                | <50          | ppm              | D-2765        |
| <b>Total Yarn Linear Density</b>    | 14,000       | Denier             | 15,556       | D-Tex            | D-1577        |
| <b>Stitch Rate</b>                  | 11.5         | Per 3"             | 15.06        | Per 10 cm        | D-5793        |
| <b>Machine Gauge</b>                | 3/8"         | In.                | .95          | cm               | D-5793        |
| <b>Flammability</b>                 | TEST         | PASSED             | TEST         | PASSED           | D-2859        |
| <b>Water Permeability w/Infill</b>  | >30          | In/hr              | >76          | cm/hr            | F-1551        |
| <b>Fabric Width</b>                 | 15           | Ft.                | 4.6          | M                | None          |



11/12/2014