




**SPORTURF™**

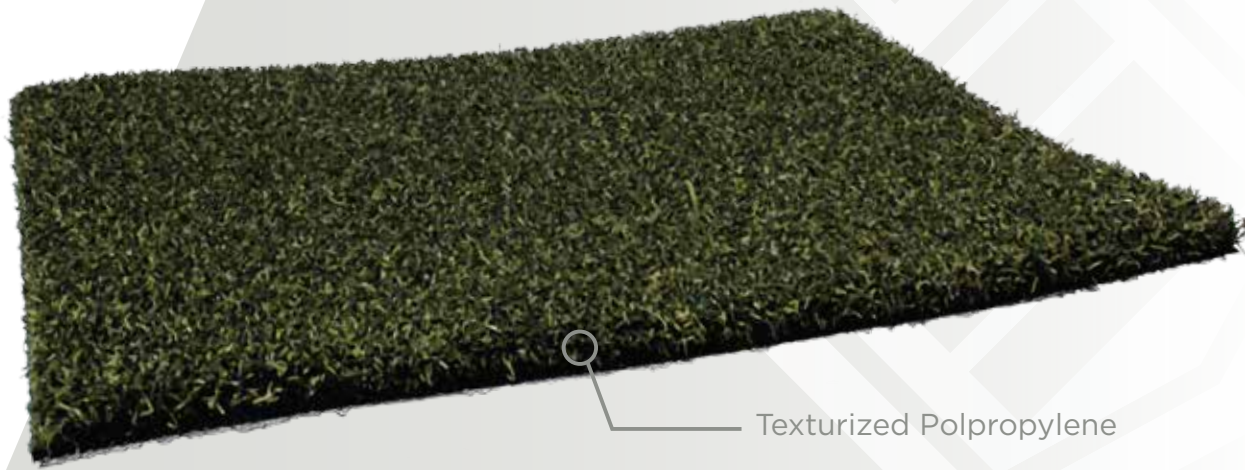



Texturized Polypropylene

**PL923**

**PROPERTY**

**DESCRIPTION**

<b>Primary Yarn Polymer</b>	Polypropylene
<b>Yarn Cross Section</b>	Texturized Polypropylene
<b>Standard Color</b>	Forest/Olive
<b>UV Stabilized</b>	Yes
<b>Fabric Construction</b>	Tufted
<b>Primary Backing</b>	Dual Layered Woven Polypropylene
<b>Coating Type</b>	SilverBack™ Polyurethane
<b>Perforations</b>	Yes
<b>Texturized Polypropylene Denier/Ends</b>	4600/8
<b>Recommended Infill</b>	5.5-6 lbs. Silica Sand
<b>Pile Height</b>	1"
<b>Pile Weight</b>	30 oz.

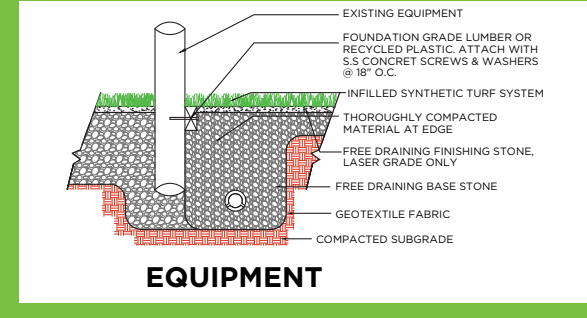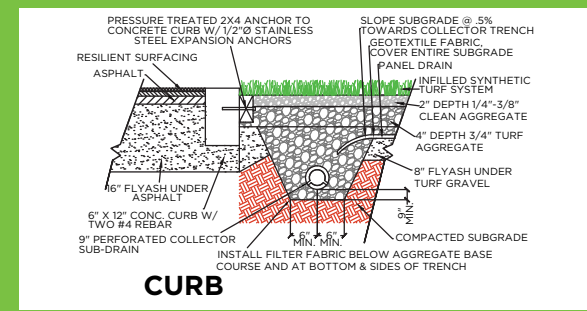

**APPLICATION**

This product can be installed indoors or outdoors on concrete or a compacted aggregate base. The dual-color sand-filled putting surface features a texturized polypropylene yarn system designed to receive chip shots with natural ball roll with less maintenance than conventional sand-filled systems.



\*Custom colors available upon request



## TESTING

## PL923

### FINISHED FABRIC

### ENGLISH SYSTEM

### METRIC SYSTEM

### ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
<b>Pile Height (Nominal)</b>	1	In.	25.4	mm.	D-5823
<b>Face Weight</b>	30	oz/yd <sup>2</sup>	1,017	g/m <sup>2</sup>	D-5848
<b>Total Fabric Weight</b>	57	oz/yd <sup>2</sup>	1,933	g/m <sup>2</sup>	D-5848
<b>Primary Backing Weight</b>	7.4	oz/yd <sup>2</sup>	251	g/m <sup>2</sup>	D-5848
<b>Secondary Coating Weight</b>	20	oz/yd <sup>2</sup>	678	g/m <sup>2</sup>	D-5848
<b>Tuft Bind</b>	>8	lbs.	>3.6	kg.	D-1335
<b>Grab Tear Strength (Average)</b>	>200	lbs.	>91	kg.	D-2256
<b>Lead Content</b>	<50	ppm	<50	ppm	D-2765
<b>Total Yarn Linear Density</b>	4,600	Denier	5,112	D-Tex	D-1577
<b>Stitch Rate</b>	19	Per 3"	24.89	Per 10 cm	D-5793
<b>Machine Gauge</b>	3/8	In.	.95	cm	D-5793
<b>Flammability</b>	TEST	PASSED	TEST	PASSED	D-2859
<b>Water Permeability w/Infill</b>	>30	In/hr	>76	cm/hr	F-1551
<b>Fabric Width</b>	15	Ft.	4.6	M	None

