





Texturized Nylon

**PL308**

**PROPERTY**

**DESCRIPTION**

<b>Primary/Stalk Yarn Polymer</b>	Nylon
<b>Yarn Cross Section</b>	Texturized Nylon
<b>Standard Color</b>	Forest Green
<b>UV Stabilized</b>	Yes
<b>Fabric Construction</b>	Tufted
<b>Primary Backing</b>	Dual Layered Woven Polypropylene
<b>Coating Type</b>	Greenback or Natural Rubber
<b>Perforations</b>	No
<b>Polypropylene Yarn Denier/Ends</b>	4400/8
<b>Recommended Infill</b>	N/A
<b>Pile Height</b>	3/8"
<b>Pile Weight</b>	36 oz.

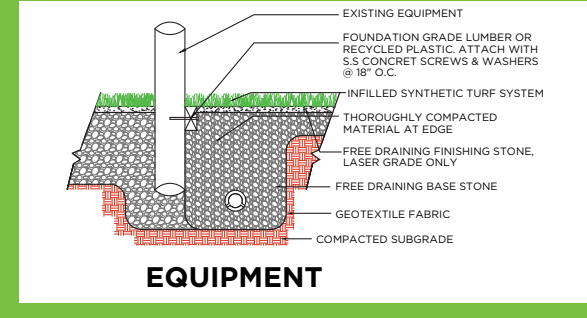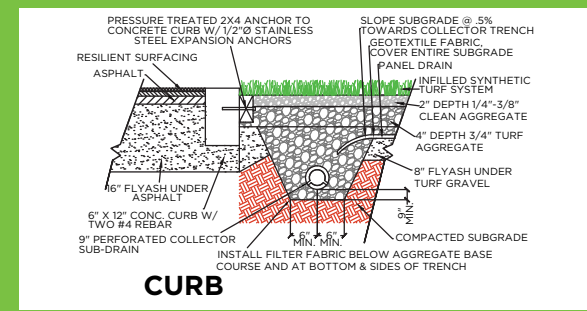

**APPLICATION**

This is a very versatile product that can be used for numerous applications. It is an excellent putting surface that provides a very realistic roll with natural speed. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



\*Custom colors available upon request



## TESTING

## TRUE TURF PL308

### FINISHED FABRIC

### ENGLISH SYSTEM

### METRIC SYSTEM

### ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
<b>Pile Height (Nominal)</b>	.375	In.	9.53	mm.	D-5823
<b>Face Weight</b>	36	oz/yd <sup>2</sup>	1,221	g/m <sup>2</sup>	D-5848
<b>Total Fabric Weight</b>	84	oz/yd <sup>2</sup>	2,848	g/m <sup>2</sup>	D-5848
<b>Primary Backing Weight</b>	7.4	oz/yd <sup>2</sup>	251	g/m <sup>2</sup>	D-5848
<b>Secondary Coating Weight</b>	41	oz/yd <sup>2</sup>	1390	g/m <sup>2</sup>	D-5848
<b>Grab Tear Strength (Average)</b>	>200	lbs.	>91	kg.	D-2256
<b>Lead Content</b>	<50	ppm	<50	ppm	D-2765
<b>Total Yarn Linear Density</b>	4,400	Denier	4,889	D-Tex	D-1577
<b>Stitch Rate</b>	26.5	Per 3"	34.715	Per 10 cm	D-5793
<b>Machine Gauge</b>	3/16"	In.	.48	cm	D-5793
<b>Flammability</b>	TEST	PASSED	TEST	PASSED	D-2859
<b>Water Permeability w/Infill</b>	>30	In/hr	>76	cm/hr	F-1551
<b>Fabric Width</b>	15	Ft.	4.6	M	None

