



SPORTURF™

Bunker Turf





Texturized Polypropylene

PL914

PROPERTY

DESCRIPTION

| | |
|---|----------------------------------|
| Primary Yarn Polymer | Polypropylene |
| Yarn Cross Section | Texturized Polyethylene |
| Standard Color | Sand |
| UV Stabilized | Yes |
| Fabric Construction | Tufted |
| Primary Backing | Dual Layered Woven Polypropylene |
| Coating Type | SilverBack™ Polyurethane |
| Perforations | No |
| Texturized Polypropylene Denier/Ends | 4600/8 |
| Recommended Infill | 2-3 lbs. Silica Sand |
| Pile Height | 1 1/8" |
| Pile Weight | 36 oz. |

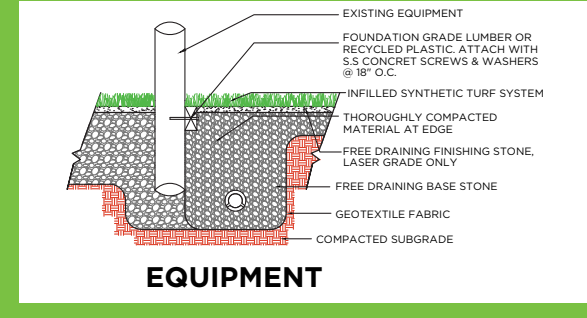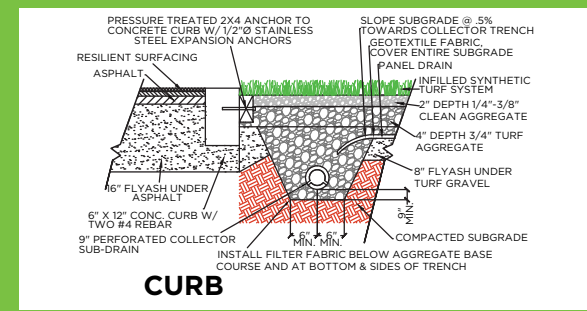

APPLICATION

This is the premium bunker turf product. This product looks and feels like a real sand trap. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



*Custom colors available upon request



TESTING

BUNKER TURF PL914

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST

| <i>Nominal Specification</i> | <i>Value</i> | <i>Units</i> | <i>Value</i> | <i>Units</i> | <i>Method</i> |
|-------------------------------------|--------------|--------------------|--------------|------------------|---------------|
| Pile Height (Nominal) | 1.125 | In. | 28.58 | mm. | D-5823 |
| Face Weight | 36 | oz/yd ² | 1,221 | g/m ² | D-5848 |
| Total Fabric Weight | 65 | oz/yd ² | 2,204 | g/m ² | D-5848 |
| Primary Backing Weight | 7.4 | oz/yd ² | 251 | g/m ² | D-5848 |
| Secondary Coating Weight | 20 | oz/yd ² | 678 | g/m ² | D-5848 |
| Tuft Bind | >8 | lbs. | >3.6 | kg. | D-1335 |
| Grab Tear Strength (Average) | >200 | lbs. | >91 | kg. | D-2256 |
| Lead Content | <50 | ppm | <50 | ppm | D-2765 |
| Total Yarn Linear Density | 4,600 | Denier | 5,112 | D-Tex | D-1577 |
| Stitch Rate | 21 | Per 3" | 27.51 | Per 10 cm | D-5793 |
| Machine Gauge | 3/8 | In. | .95 | cm | D-5793 |
| Flammability | TEST | PASSED | TEST | PASSED | D-2859 |
| Water Permeability w/Infill | >30 | In/hr | >76 | cm/hr | F-1551 |
| Fabric Width | 15 | Ft. | 4.6 | M | None |

