




SPORTURF™

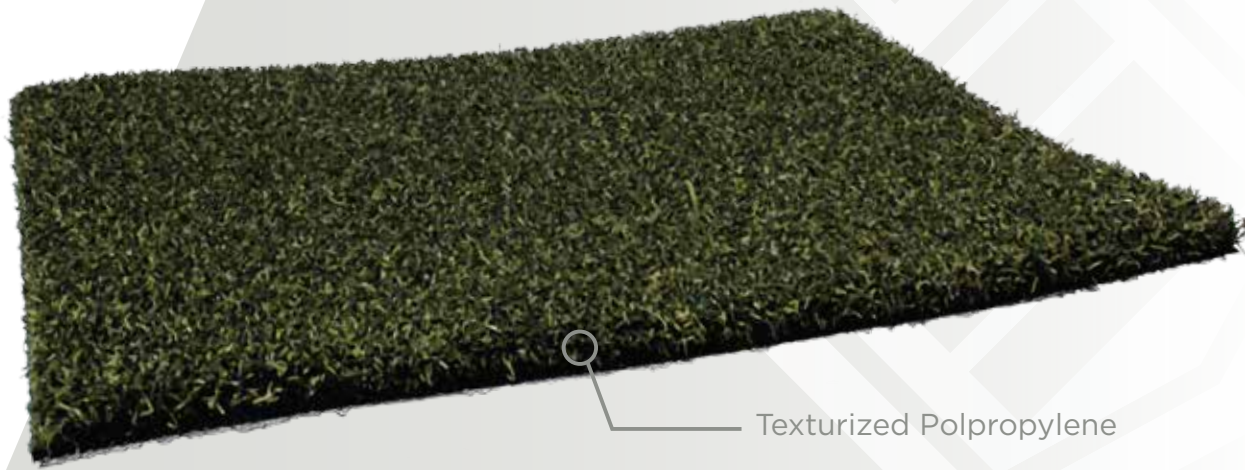


Texturized Polypropylene

PL923


PROPERTY

DESCRIPTION

Primary Yarn Polymer	Polypropylene
Yarn Cross Section	Texturized Polypropylene
Standard Color	Forest/Olive
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	SilverBack™ Polyurethane
Perforations	Yes
Texturized Polypropylene Denier/Ends	4600/8
Recommended Infill	5.5-6 lbs. Silica Sand
Pile Height	1"
Pile Weight	30 oz.

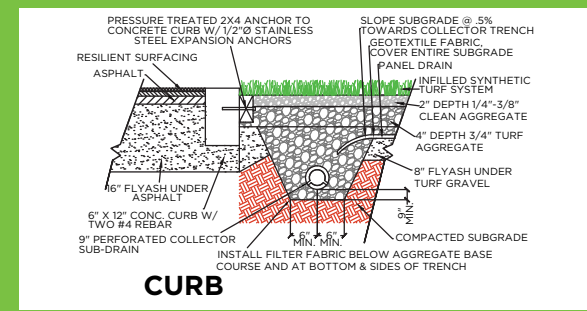

CURB

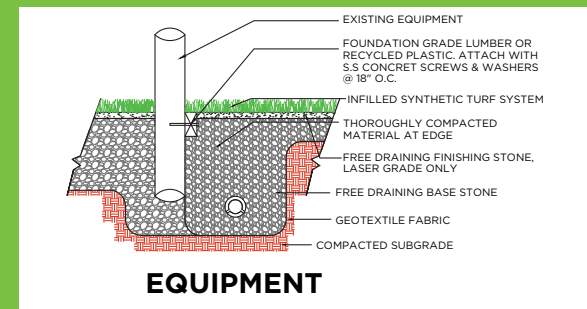

EQUIPMENT

APPLICATION

This product can be installed indoors or outdoors on concrete or a compacted aggregate base. The dual-color sand-filled putting surface features a texturized polypropylene yarn system designed to receive chip shots with natural ball roll with less maintenance than conventional sand-filled systems.



*Custom colors available upon request



TESTING

PL923

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	1	In.	25.4	mm.	D-5823
Face Weight	30	oz/yd ²	1,017	g/m ²	D-5848
Total Fabric Weight	57	oz/yd ²	1,933	g/m ²	D-5848
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	4,600	Denier	5,112	D-Tex	D-1577
Stitch Rate	19	Per 3"	24.89	Per 10 cm	D-5793
Machine Gauge	3/8	In.	.95	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	>30	In/hr	>76	cm/hr	F-1551
Fabric Width	15	Ft.	4.6	M	None

