



SPORTURF™

Putt One




Texturized Nylon

PL306


PROPERTY

DESCRIPTION

Primary/Stalk Yarn Polymer	Nylon
Yarn Cross Section	Texturized Nylon
Standard Color	Forest Green
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	5mm Polyurethane Foam
Perforations	No
Polypropylene Yarn Denier/Ends	4400/8
Recommended Infill	N/A
Pile Height	¼"
Pile Weight	25 oz.

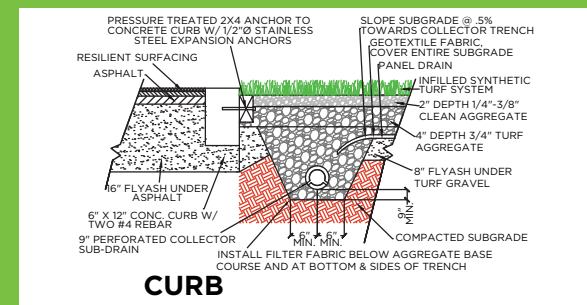

CURB

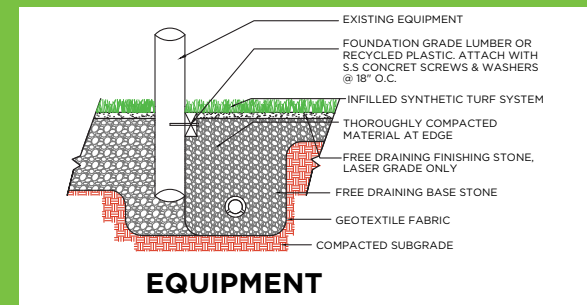

EQUIPMENT

APPLICATION

The Multicolored yarn used in this product provides an authentic look that is hard to find. This product performs best with sand infill and is designed to hold short chip shots while providing a true roll. This product can be installed outdoors or indoors on a compacted aggregate base or over concrete.



*Custom colors available upon request


TESTING
PUTT ONE PL306
FINISHED FABRIC
ENGLISH SYSTEM
METRIC SYSTEM
ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	.25	In.	6.35	mm.	D-5823
Face Weight	25	oz/yd ²	848	g/m ²	D-5848
Total Fabric Weight	107	oz/yd ²	3,628	g/m ²	D-5848
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5848
Secondary Coating Weight	75	oz/yd ²	2543	g/m ²	D-5848
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	4,400	Denier	4,889	D-Tex	D-1577
Stitch Rate	21	Per 3"	27.51	Per 10 cm	D-5793
Machine Gauge	3/16"	In.	.95	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	>30	In/hr	>76	cm/hr	F-1551
Fabric Width	12	Ft.	3.6	M	None

