



SPORTURF™



True Putt



Texturized Nylon

PL307

PROPERTY	DESCRIPTION
Primary/Stalk Yarn Polymer	Nylon
Yarn Cross Section	Texturized Nylon
Standard Color	Forest Green
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	Greenback or Natural Rubber
Perforations	No
Polypropylene Yarn Denier/Ends	4400/8
Recommended Infill	N/A
Pile Height	9/16"
Pile Weight	48 oz.

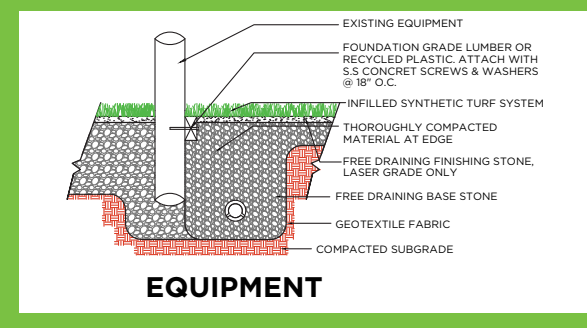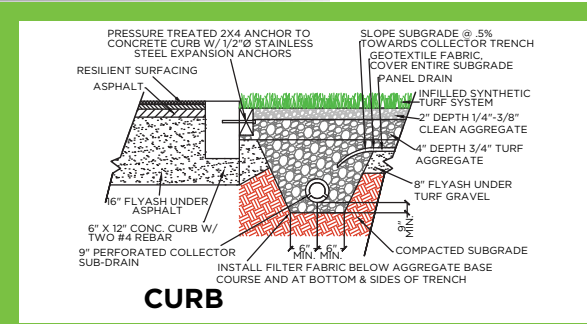

APPLICATION

This is a very versatile product that can be used for numerous applications. It is an excellent putting surface that provides a very realistic roll with natural speed. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



*Custom colors available upon request



TESTING

TRUE PUTT PL307

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	.5625	In.	14.29	mm.	D-5823
Face Weight	48	oz/yd ²	1627	g/m ²	D-5848
Total Fabric Weight	96	oz/yd ²	3,255	g/m ²	D-5848
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Coating Weight	41	oz/yd ²	1390	g/m ²	D-5848
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	4,400	Denier	4,889	D-Tex	D-1577
Stitch Rate	26.5	Per 3"	34.715	Per 10 cm	D-5793
Machine Gauge	3/16"	In.	.48	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	>30	In/hr	>76	cm/hr	F-1551
Fabric Width	15	Ft.	4.6	M	None

