



**PL308**

PROPERTY	DESCRIPTION
Primary/Stalk Yarn Polymer	Nylon
Yarn Cross Section	Texturized Nylon
Standard Color*	Forest Green
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	Greenback or Natural Rubber
Perforations	No
Polypropylene Yarn Denier/Ends	4400/8
Recommended Infill	N/A
Pile Height	3/8"
Pile Weight	84 oz.

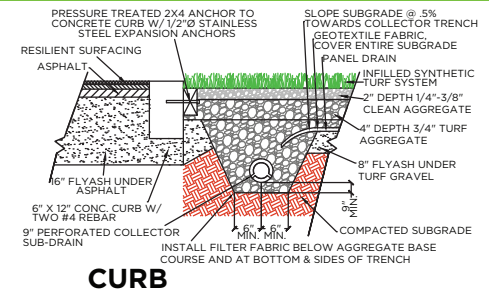

**CURB**

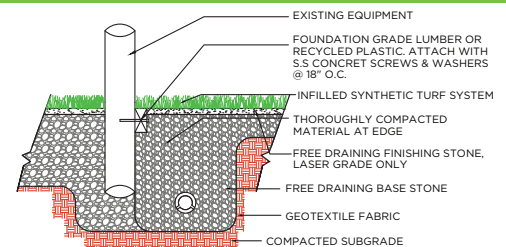

**EQUIPMENT**

## APPLICATION

This is a very versatile product that can be used for numerous applications. It is an excellent putting surface that provides a very realistic roll with natural speed. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

## TESTING

## TRUE TURF PL308

### FINISHED FABRIC

### ENGLISH SYSTEM

### METRIC SYSTEM

### ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
<b>Pile Height (Nominal)</b>	.375	In.	9.53	mm.	D-5823
<b>Face Weight</b>	36	oz/yd <sup>2</sup>	1,221	g/m <sup>2</sup>	D-5848
<b>Total Fabric Weight</b>	84	oz/yd <sup>2</sup>	2,848	g/m <sup>2</sup>	D-5848
<b>Primary Backing Weight</b>	7.4	oz/yd <sup>2</sup>	251	g/m <sup>2</sup>	D-5848
<b>Secondary Coating Weight</b>	41	oz/yd <sup>2</sup>	1390	g/m <sup>2</sup>	D-5848
<b>Grab Tear Strength (Average)</b>	>200	lbs.	>91	kg.	D-2256
<b>Lead Content</b>	<50	ppm	<50	ppm	D-2765
<b>Total Yarn Linear Density</b>	4,400	Denier	4,889	D-Tex	D-1577
<b>Stitch Rate</b>	26.5	Per 3"	34.715	Per 10 cm	D-5793
<b>Machine Gauge</b>	3/16"	In.	.48	cm	D-5793
<b>Flammability</b>	TEST	PASSED	TEST	PASSED	D-2859
<b>Fabric Width</b>	15	Ft.	4.6	M	None

8/28/2023