



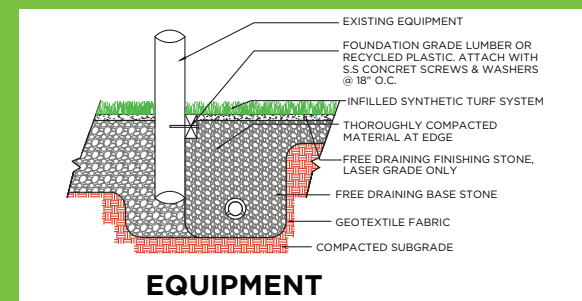

PL960

PROPERTY	DESCRIPTION
Primary/Stalk Yarn Polymer	Polyethylene
Secondary/Thatch Yarn Polymer	Polyethylene
Yarn Cross Section	Texturized Polyethylene
Standard Color*	Field/Olive with Field/Jute Thatch
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	SilverBack™ Polyurethane
Perforations	Yes
Polyethylene Yarn Denier/Ends	13000/8
Texturized Nylon Yarn Denier/Ends (Thatch)	5000/8
Pile Height	1 1/16"
Pile Weight	78 oz.

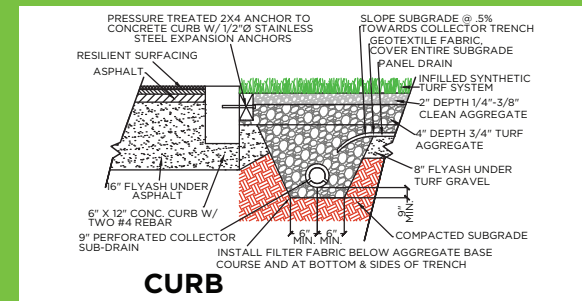

APPLICATION

This is an excellent landscape /multipurpose product that offers thatch, which provides added body, reducing the amount of infill needed. The two color blend of this surface provides a truly authentic look and feel that resembles a natural lawn. This product can be used for landscapes, playgrounds, pet areas, fringes, indoor arenas, training facilities and much more. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



*Custom colors available upon request



TESTING

SASSY GRASS™

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	1.563	In.	39.7	mm.	D-5823
Face Weight	78	oz/yd ²	2645	g/m ²	D-5828
Total Fabric Weight	105	oz/yd ²	3560	g/m ²	D-5828
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5828
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5828
Tuft Bind	>8	lbs.	>3.6	kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2766
Total Yarn Linear Density	10,400	Denier	17,553	D-Tex	D-1577
Tensile Strength	8	lbs	3.63	Kg.	D-5034
Stitch Rate	9.5	Per 3"	15.1	Per 10 cm	D-5793
Machine Gauge	.25	In.	.96	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	>30	In/hr	>76	cm/hr	F-1551
Fiber Thickness	22	mils	235	microns	D-3218
Fabric Width	15	Ft.	4.6	M	None



8/25/2023