
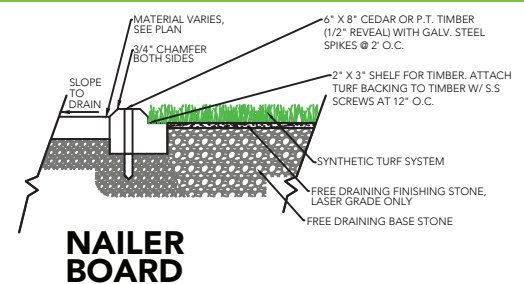


PL357

PROPERTY	DESCRIPTION
Primary Yarn Polymer	Polypropylene
Yarn Cross Section	Texturized Polypropylene
Standard Color*	Pine (foam w/ fleece); Viridian (foam w/o fleece)
UV Stabilized	Yes
Fabric Construction	Tufted
Coating Type	3mm Polyurethane Foam
Perforations	No
Polypropylene Yarn Denier/Ends	4600/8
Recommended Infill	Per Specification
Pile Height	1/4"
Pile Weight	22 oz.

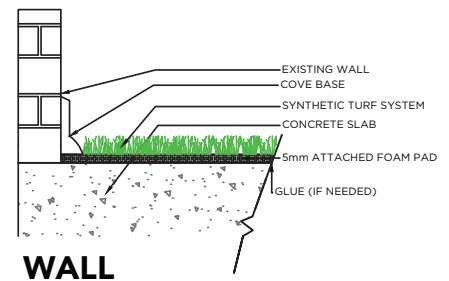

APPLICATION

This is an excellent product that has become one of the most popular versatile surfaces available. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



*Custom colors available upon request

TESTING

PL357

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	.25	In.	6.35	mm.	D-5823
Face Weight	22	oz/yd ²	623.69	g/m ²	D-5848
Total Fabric Weight (3mm w/ Fleece)	83	oz/yd ²	2814	g/m ²	D-5848
Total Fabric Weight (3mm w/o Fleece)	86	oz/yd ²	2916	g/m ²	D-5848
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5848
Secondary Coating Weight (3mm w/ Fleece)	55	oz/yd ²	1865	g/m ²	D-5848
Secondary Coating Weight (3mm w/o Fleece)	58	oz/yd ²	1966	g/m ²	D-5848
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	4,600	Denier	5,111	D-Tex	D-1577
Stitch Rate	18	Per 3"	45.72	Per 10 cm	D-5793
Machine Gauge	0.1875"	In.	.48	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fabric Width	15	Ft.	4.6	M	None

8/28/2023